


MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet

tasker® C209 – 1x0,75 mm² Unbalanced Microphone Cable

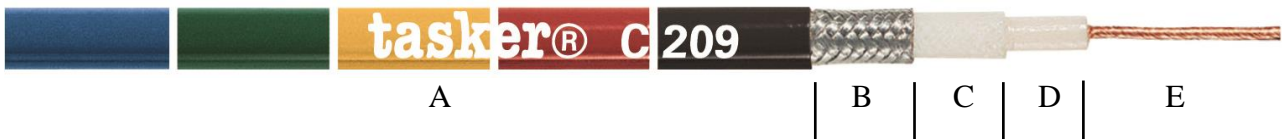

CATEGORY Unbalanced Microphone Cable (See Audio Catalogue)
APPLICATIONS Premade cables for instrumental cable like Guitar, Bass and Keyboards

- A:** Soft **PVC** Sheath, available in different colors.
Outer Diam. Ø 6,20 (±0,10) mm.
- B:** O.F.C. tinned copper braid Shielding, covering 95%.
- C:** Cotton inner filler.
- D:** Core Insulation in White PVC. Diam. Ø 3,00 (±0,10) mm.
- E:** O.F.C. red copper formation 24x0,20 mm.
Nom. Cross section 1x0,75 mm².

MARKING **tasker®** C209 1x0,75 mm² O.F.C. professional noiseless low capacity unbalanced Microphone Cable – Made in Italy

CUSTOM PRODUCTION This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	21,93 Ω/Km
Capacity Core/Shield	236 pF/m
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 26.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			